
OMEGA **N**TECH









CABLE ASSEMBLIES

RV-K VS H07RN

A system is only as strong as it's weakest connection.

Rely on Omegatech's handmade, individually tested cable assemblies constructed from lightweight, robust components that have proven themselves through the harshest conditions the road can throw at them. If that's not enough, Omegatech offers a 2 year workmanship warranty on all manufactured products.

KEY FEATURES

Ω Custom Labeling:

Omegatech can add you company logo, bar code or colour coding system at no additional cost.

Ω Individual Serial Number:

Each cable assembly is individually serialised for easy inventory and stock control and internal quality control purposes.

Ω Hand Assembled:

Each cable assembly is created, by hand, in Omegatech's production facility to your exacting specifications.

Ω Testing:

All Omegatech cable assemblies are tested to our strict internal quality assurance standards.

Ω Quality Control:

All Omegatech cable assemblies are thoroughly tested in a multi-stage process, to ensure you receive the highest quality product that meets our highest quality standards.

We find solutions to problems. All of our products are born out of industry requirements and feedback. Got a problem, talk to us today. If we don't have a solution, we will make one!

CATALOGUE | CABLE ASSEMBLIES

DESCRIPTION

The OmegaTech cable range is designed for fixed or mobile applications where power distribution is required. OmegaTech offers a variety of custom configurations to suit individual needs.

KEY FEATURES

- Ω 30% lighter and 60% more flexible than traditional H07RN rubber
- Ω Same, if not improved, current carrying ability
- Ω Low Voltage 0.6/1kV
- Cross-linked polyethylene (XLPE) Insulation 0
- Chemical & Oil resistant Ω
- Ω UV Resistant
- **Ω** Water Resistant
- Suitable for Open Air, Buried or In Conduit Installation Conditions Ω
- Ω Maximum Service Temperature: 90°C
- Minimum service temperature: -40°C Ω
- Ω Maximum short-circuit temperature: 250°C (max 5sec)
- Ω Full Quality Control with component Serial Number tracking

COMPLIANCE

RV-K PowerFlex Cables comply with

- Ω IEC 60502-1:2021 Power Cables with Extruded Insulation and Their Accessories
- Ω IEC 60228:2003 Conductors of Insulated Cable
- Ω IEC 60332-1-3:2004 Flame Non-Propagation
- Ω CE, SEC, Bureau Veritas, AENOR, SASO, RoHS, KEMA KEUR

RV-K vs H07RN

Diameter (mm)			Bend	Bend Radius (mm)		Weight (kg/km)		Current (A - Open Air)				
Cable	RV-K	HO7RN	Compare	RV-K	HO7RN	Compare	RV-K	HO7RN	Compare	RV-K	HO7RN	Compare
3G1.5	8.9	11.9	25%	44.5	95.2	53%	110	134	18%	26	26	0%
3G2.5	9.8	14.0	30%	49.0	112.0	56%	145	195	26%	36	36	0%
3G4	11.0	16.2	32%	55.0	129.6	58%	200	290	31%	49	49	0%
4G2.5	10.7	15.5	31%	53.5	124.0	57%	175	245	29%	36	31	14%
4G4	12.0	18.0	33%	60.0	144.0	58%	245	357	31%	49	42	14%
5G4	13.2	19.9	34%	66.0	159.2	59%	300	453	34%	42	42	0%
5G6	14.7	22.2	34%	73.5	177.6	59%	405	557	27%	54	54	0%
5G10	17.0	29.1	42%	85.0	232.8	63%	625	1001	38%	75	75	0%
			33%			58%			29%			4%




AUSTRALIAN 3PIN GPO & IEC

MOLDED PIGGYBACK



OTS-GI-xx-MLD 1m, 1.5m, 2m, 3m, 5m Ω Molded Piggyback IEC Lead Ω 3core 1.5mm² cable

HAND MADE PIGGYBACK EXTENSIONS



1.5m, 2m, 3m, m, 25m, 30m, 0m	$ \begin{array}{ll} \Omega & \mbox{10A Piggyback Extension} \\ \Omega & \mbox{3core 1.5mm}^2 \mbox{ light weight RV-K Powerflex} \\ \Omega & \mbox{PowerCON / HP Series connectors} \\ \Omega & \mbox{Velcro cable wrap, clear heat shrink, labelled with length & serial} \end{array} $
• HD 10m, 15m, 20m, 0m, 45m, 50m	Ω 15A Mains Extension Ω 3core 2.5mm ² light weight RV-K Powerflex Ω 15A GPO connectors

 Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

10A LOCKING IEC LEADS



1	OTS-GI2-xx 0.5m, 0.75m, 1m, 1.5m, 2m, 3m		Piggyback to Locking C13 IEC 3core 1.5mm ² light weight RV-K Powerflex
	OTS-PI2-xx 0.5m, 0.75m, 1m, 1.5m, 2m, 3m		White PowerCON to Locking C13 IEC 3core 1.5mm ² light weight RV-K Powerflex
	OTS-TI2-xx 0.5m, 0.75m, 1m, 1.5m, 2m, 3m		TrueCON Plug to Locking C13 IEC 3core 1.5mm ² light weight RV-K Powerflex
/		Ω Ω	0 0

15A LOCKING IEC LEADS



• Gl4-xx 1.75m, 1m, 1.5m, 2m, 3m	$ \Omega \mbox{15A GPO Plug to Lo} \\ \Omega \mbox{3core 1.5mm}^2 \mbox{ cable} $
• PI4-xx 9.75m, 1m, 1.5m, 2m, 3m	Ω White PowerCON to Ω 3core 1.5mm ² cable
• TI4-xx 9.75m, 1m, 1.5m, 2m, 3m	Ω TrueCON Plug to Lo $Ω$ 3core 1.5mm ² cable
• B1I4-xx 2.75m. 1m. 1.5m. 2m. 3m	Ω 16A CeeForm Plug

CATALOGUE | CABLE ASSEMBLIES

cking C19 IEC


o Locking C19 IEC

ocking C19 IEC

to Locking C19 IEC

HYBRID


GPO HYBRID CABLE



POWERCON HYBRID CABLE

OTS-HYB1-P3-xx 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	ນ ດ ດ ດ
OTS-HYB1-P5-xx 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	0 0 0

TRUECON HYBRID CABLE



CEEFORM HYBRID CABLE



$\Omega~$ Piggyback Plug / 10A Socket & 3pin Digital XLR Hybrid Loom Ω 3core 1.5mm² & 1x AES/DMX Signal hybrid cable Ω PowerCON & Neutrik XX Series Connectors Ω 250mm cable fans Ω Velcro cable wrap, clear heat shrink, labelled with length & serial $\Omega~$ Piggyback Plug / 10A Socket & 5pin Digital XLR Hybrid Loom Ω 3core 1.5mm² & 1x AES/DMX Signal hybrid cable Ω PowerCON & Neutrik XX Series Connectors Ω 250mm cable fans Ω Velcro cable wrap, clear heat shrink, labelled with length & serial PowerCON & 3pin Digital XLR Hybrid Loom 3core 1.5mm² & 1x AES/DMX Signal hybrid cable PowerCON & Neutrik XX Series Connectors 250mm cable fans Velcro cable wrap, clear heat shrink, labelled with length & serial PowerCON & 5pin Digital XLR Hybrid Loom 3core 1.5mm² & 1x AES/DMX Signal hybrid cable PowerCON & Neutrik XX Series Connectors 250mm cable fans Velcro cable wrap, clear heat shrink, labelled with length & serial Ω TrueCON & 3pin Digital XLR Hybrid Loom Ω 3core 1.5mm² & 1x AES/DMX Signal hybrid cable Ω TrueCON & Neutrik XX Series Connectors Ω 250mm cable fans Ω Velcro cable wrap, clear heat shrink, labelled with length & serial Ω TrueCON & 5pin Digital XLR Hybrid Loom Ω 3core 1.5mm² & 1x AES/DMX Signal hybrid cable Ω TrueCON & Neutrik XX Series Connectors Ω 250mm cable fans

 Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

POWERCON

TRUECON

POWERCON EXTENSION

OTS-PP-xx 0.5m, 0.75m, 1m, 1.5m, 2r 5m, 10m, 15m, 20m, 25m, 35m, 40m, 45m, 50m
OTS-PP-xx-HD 0.5m, 0.75m, 1m, 1.5m, 2r 5m, 10m, 15m, 20m, 25m, 35m, 40m, 45m, 50m

POWERCON ADAPTERS

OTS-GP-xx 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω PowerCON Supply Lead Ω 10A Piggyback Plug to Blue PowerCON Ω 3core 1.5mm² light weight RV-K black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-GP-xx-HD 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω PowerCON Supply Lead - Heavy Duty Ω 15A GPO Plug to Blue PowerCON Ω 3core 2.5mm² light weight RV-K black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-PG-xx 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω PowerCON Tail Lead Ω White PowerCON to 10A GPO Socket Ω 3core 1.5mm² light weight RV-K black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-PG-xx-HD 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω PowerCON Tail Lead - Heavy Duty Ω White PowerCON to 15A GPO Socket Ω 3core 2.5mm² light weight RV-K Black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

m, 10m, 15m, 20m, 25m, 30m,

5m, 10m, 15m, 20m, 25m, 30m,

Ω PowerCON Extension

Ω White PowerCON to Blue PowerCON

Ω PowerCON Extension - Heavy Duty

Ω White PowerCON to Blue PowerCON

Ω 3core 1.5mm² light weight RV-K black cable

Ω 3core 2.5mm² light weight RV-K black cable


Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

 $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial


POWERCON / TRUECON ADAPTERS

	OTS-PT-xx 0.25m, 0.5m, 1m, 2m	 Ω PowerCON to TrueCON Adapter Ω White PowerCON to TrueCON Socket 			
"		$\Omega~$ 3core 1.5mm² light weight RV-K black cable			
		Ω Velcro cable wrap, clear heat shrink, labelled with length & serial			
	OTS-TP-xx	Ω TrueCON to PowerCON Adapter			
	0.25m, 0.5m, 1m, 2m	Ω TrueCON Plug to Blue PowerCON			
		Ω 3core 1.5mm ² light weight RV-K Black cable			
		$\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial			

TRUECON EXTENSION



TRUECON ADAPTERS

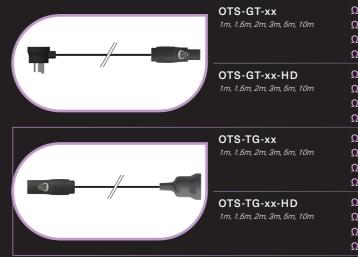

CATALOGUE | CABLE ASSEMBLIES

Ω TrueCON Extension

- 0.5m, 0.75m, 1m, 1.5m, 2m, 3m, Ω TrueCON Plug to TrueCON Socket
 - Ω 3core 1.5mm² light weight RV-K black cable
 - Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
 - Ω TrueCON Extension Heavy Duty
 - Ω TrueCON Plug to TrueCON Socket
 - $\Omega~$ 3core 2.5mm² light weight RV-K black cable
 - $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω TrueCON Supply Lead

- Ω 10A Piggyback Plug to TrueCON Socket
- Ω 3core 1.5mm² light weight RV-K black cable
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω TrueCON Supply Lead - Heavy Duty

- Ω 15A GPO Plug to TrueCON Socket
- Ω 3core 2.5mm² light weight RV-K black cable
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω TrueCON Tail Lead

- Ω TrueCON Plug to 10A GPO Socket
- Ω 3core 1.5mm² light weight RV-K black cable
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω TrueCON Tail Lead - Heavy Duty

- Ω TrueCON Plug to 15A GPO Socket
- Ω 3core 2.5mm² light weight RV-K black cable
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

CEEFORM

56 SERIES

CEEFORM 1Ø EXTENSION

	OTS-B1-xx 0.5m, 0.75m, 1m, 1.5m, 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	$\begin{array}{l} \Omega \\ \Omega \end{array} \\ \begin{array}{l} \text{CeeForm 16A 3pin Extension} \\ \Omega \\ \text{3core 1.5mm^2 light weight RV-K Powerflex} \\ \Omega \\ \end{array} \\ \begin{array}{l} \text{PCE Black CeeForm connectors} \\ \Omega \\ \end{array} \\ \begin{array}{l} \text{Velcro cable wrap, clear heat shrink, labelled with length & serial } \end{array} \\ \end{array}$
	OTS-B1-xx-HD 0.5m, 0.75m, 1m, 1.5m, 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	$\begin{array}{l} \Omega \\ \Omega \end{array} \\ \begin{array}{l} \textbf{CeeForm 16A 3pin Extension - Heavy Duty} \\ \Omega \\ \mbox{3core 2.5mm}^2 \mbox{ light weight RV-K Powerflex} \\ \end{array} \\ \begin{array}{l} \Omega \\ \mbox{PCE Black CeeForm connectors} \\ \Omega \\ \end{array} \\ \begin{array}{l} \textbf{Velcro cable wrap, clear heat shrink, labelled with length & serial} \\ \end{array} \\ \end{array}$
	OTS-B3-xx 1m, 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	$\begin{array}{l} \Omega \\ \mbox{GeeForm 32A 3pin Extension} \\ \Omega \\ \mbox{3core 4mm}^2 \mbox{ light weight RV-K Powerflex} \\ \Omega \\ \mbox{PCE Black (blue) CeeForm connectors} \\ \Omega \\ Velcro cable wrap, clear heat shrink, labelled with length & serial shrink, labelled with len$
	OTS-B3-xx-HD 1m, 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	 Ω CeeForm 32A 3pin Extension - Heavy Duty Ω 3core 6mm² light weight RV-K Powerflex Ω PCE Black (blue) CeeForm connectors Q Veloco cable wrap, clear best shrink, labelled with length & series

CEEFORM 1Ø ADAPTERS

OTS-GB1-xx 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω CeeForm 16A 3pin Supply Lead Ω Piggyback Plug to CeeForm Black (blue) Socket Ω 3core 1.5mm² light weight RV-K black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-GB1-xx-HD 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω CeeForm 16A 3pin Supply Lead - Heavy Duty Ω 15A GPO Plug to CeeForm Black (blue) Socket Ω 3core 2.5mm² light weight RV-K black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-B1G-xx 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω CeeForm 16A 3pin Tail Lead Ω CeeForm Black (blue) Plug to 10A GPO Socket Ω 3core 1.5mm² light weight RV-K black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-B1G-xx-HD 1m, 1.5m, 2m, 3m, 5m, 10m	 Ω CeeForm 16A 3pin Tail Lead - Heavy Duty Ω CeeForm Black (blue) Plug to 15A GPO Socket Ω 3core 2.5mm² light weight RV-K Black cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial


CEEFORM 3Ø EXTENSION

OTS-C1-xx 1m., 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	 Ω CeeForm 16A 5pin Extension Ω 5core 2.5mm² light weight RV-K Powerflex Ω PCE Black (red) CeeForm connectors Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-C3-xx 1m, 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	 Ω CeeForm 32A 5pin Extension Ω 5core 6mm² light weight RV-K Powerflex Ω PCE Black (red) CeeForm connectors Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
OTS-C6-xx 5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	 Ω CeeForm 63A 5pin Extension Ω 5core 10mm² light weight RV-K Powerflex Ω PCE Black (red) CeeForm connectors Ω Velcro cable wrap, clear heat shrink, labelled with length & serial


56 SERIES 32A 1Ø EXTENSION



56 SERIES 32A 3Ø EXTENSION



32A 3Ø ADAPTERS

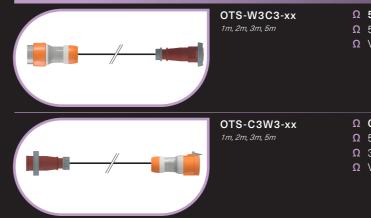

CATALOGUE | CABLE ASSEMBLIES



Ω 56 Series 32A 3pin Extension

- 5m, 10m, 15m, 20m, 25m, 30m, Ω 3core 4mm² light weight RV-K Powerflex
 - Ω 32A 3pin 56 Series Connectors
 - Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω 56 Series 32A 5pin Extension

- 1m, 2m, 3m, 5m, 10m, 15m, 20m, Ω 5core 6mm² light weight RV-K Powerflex
 - Ω 32A 5pin 56 Series Connectors
 - Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

$\Omega~$ 56 Series 32A 5pin Extension - Heavy Duty

- 1m, 2m, 3m, 5m, 10m, 15m, 20m, Ω 5core 10mm² light weight RV-K Powerflex
 - Ω 32A 5pin 56 Series Connectors
 - Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

$\Omega~$ 56 Series to CeeForm 32A 5pin Adapter

- Ω 5core 6mm² light weight RV-K Powerflex
- $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial

$\Omega~$ CeeForm to 56 Series 32A 5pin Adapter

- Ω 5core 10mm² light weight RV-K Powerflex
- Ω 32A 5pin 56 Series Connectors
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

WIELAND

10PIN WIELAND BREAK-IN


1.5m	 Ω Molded Piggyback Plug Break-in Ω 4x Molded Piggyback plugs to "Wieland" 10pin socket w/ 2 clips Ω 3core 1.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
1.5m	 Ω Premium Piggyback Plug Break-in Ω 4x PDL Piggyback plugs to "Wieland" 10pin socket w/ 2 clips Ω 3core 1.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
1.5m	$\begin{array}{llllllllllllllllllllllllllllllllllll$
1.5m	$\begin{array}{llllllllllllllllllllllllllllllllllll$
1.5m	 Ω 16A CeeForm Break-in Ω 4x 16A 3pin Black CeeForm Plugs to "Wieland" 10pin socket w/ 2 clips Ω 3core 1.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

10PIN WIELAND EXTENSION


		OTS-10P-xx	Ω	10pin Black Wieland Loom
		5m, 10m, 15m, 20m, 25m, 30m, 35m, 40m, 45m, 50m	Ω	Genuine Harting Connectors
	-		Ω	12core 1.5mm ² Softflex lighting cable
			Ω	Cam-buckle wrap, clear heat shrink, labelled wit
			Ω	Hand made individually tested cable assemblies
		OTS-10P-xx-HD 5m, 10m, 15m, 20m, 25m, 30m,	Ω	10pin Black Wieland Loom - Heavy Duty
			Ω	Genuine Harting Connectors
		35m, 40m, 45m, 50m	Ω	12core 2.5mm ² Softflex lighting cable
			Ω	Cam-buckle wrap, clear heat shrink, labelled wit
			Ω	Hand made individually tested cable assemblies

WIELAND

10PIN WIELAND BREAK-OUT

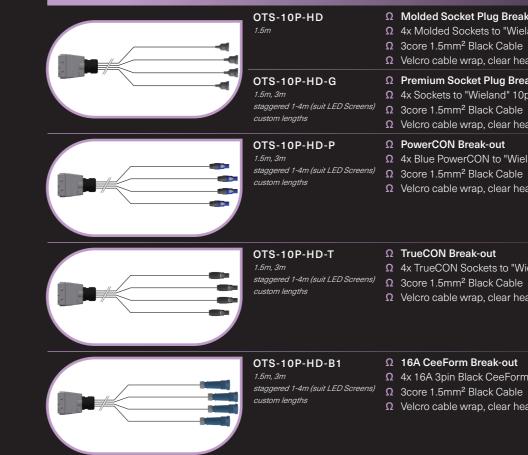

6PIN CHAIN MOTOR LOOMS

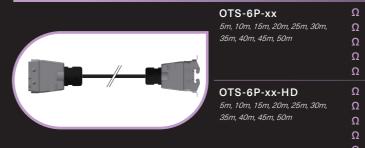

CATALOGUE | CABLE ASSEMBLIES

ith length & serial

ith length & serial



- Ω Molded Socket Plug Break-out Ω 4x Molded Sockets to "Wieland" 10pin plug w/ 4 pegs Ω 3core 1.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial Ω Premium Socket Plug Break-out
- Ω 4x Sockets to "Wieland" 10pin plug w/ 4 pegs Ω 3core 1.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
- Ω PowerCON Break-out
- Ω 4x Blue PowerCON to "Wieland" 10pin plug w/ 4 pegs
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
- Ω TrueCON Break-out
- Ω 4x TrueCON Sockets to "Wieland" 10pin plug w/ 4 pegs
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω 16A CeeForm Break-out

- $\Omega~4x\,16A$ 3pin Black CeeForm Sockets to "Wieland" plug w/ 4 pegs
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω 6pin Black Wieland Motor Loom

- **Ω** Genuine Harting Connectors
- Ω core 1.5mm² Softflex lighting cable
- Ω Cam-buckle wrap, clear heat shrink, labelled with length & serial
- Ω $\,$ Hand made individually tested cable assemblies
- Ω 6pin Black Wieland Motor Loom Heavy Duty
- **Ω** Genuine Harting Connectors
- Ω 7 core 2.5 mm² Softflex lighting cable
- $\Omega~$ Cam-buckle wrap, clear heat shrink, labelled with length & serial
- Ω Hand made individually tested cable assemblies


SOCAPEX


SOCAPEX

19PIN SOCAPEX BREAK-IN OTS-19P-TL-G Ω Piggyback Plug Break-in Ω 6x PDL Piggyback plugs to **19pin Socapex** socket Ω 3core 1.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial Ω 15A Plug Break-in OTS-19P-TL-G-HD Ω 6x 15A GPO plugs to **19pin Socapex** socket Ω 3core 2.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial Ω PowerCON Break-in OTS-19P-TL-P 1.5m Ω 6x Grey PowerCONs to **19pin Socapex** socket Ω 3core 2.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial Ω TrueCON Break-in OTS-19P-TL-T Ω 6x TrueCON Plugs to 19pin Socapex socket 1.5m -0 Ω 3core 2.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial Ω 16A CeeForm Break-in OTS-19P-TL-B1 Ω _6x 16A 3pin Black CeeForm Plugs to **19pin Socapex** socket 1.5m Ω 3core 2.5mm² Black Cable Ω Velcro cable wrap, clear heat shrink, labelled with length & serial **19PIN SOCAPEX EXTENSION** Ω 19pin Socapex Loom - Light Duty OTS-19P-xx-LD







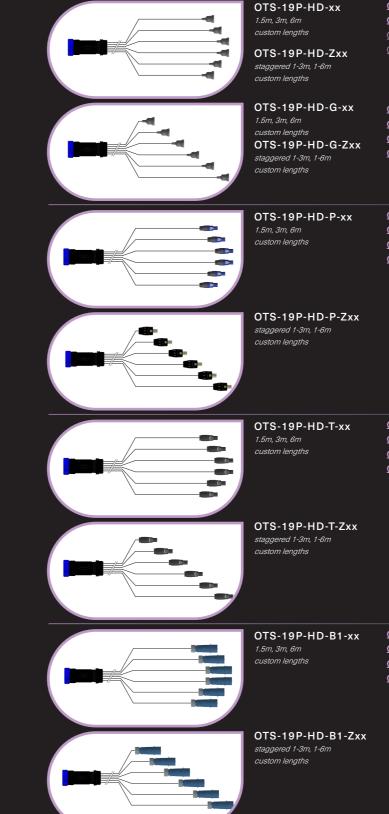



Ω Molded Socket Plug Break-out

 $\Omega~$ 6x 10A GPO Sockets to 19pin Socapex plug

 Ω 3core 1.5mm² Black Cable

 $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω Premium Socket Plug Break-out

- Ω 6x 15A GPO Sockets to 19pin Socapex plug
- Ω 3core 2.5mm² Black Cable
- $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω PowerCON Break-out

- Ω 6x Blue PowerCON to 19pin Socapex plug
- $\Omega~$ 3core 2.5mm² Black Cable
- $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω TrueCON Break-out

- Ω 6x TrueCON Sockets to 19pin Socapex plug
- Ω 3core 2.5mm² Black Cable
- $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω 16A CeeForm Break-out

- $\Omega~$ 6x 16A 3pin Black CeeForm Sockets to 19pin Socapex plug
- Ω 3core 2.5mm² Black Cable
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial


SPEAKER

2POLE SPEAKON CABLE

//	

OTS-NL2/2-xxΩ2pole SpeakON Speaker Cable1m, 1.5m, 2m, 3m, 5m, 10m, 15m,
20m, 25m, 30mΩ2x 2.5mm² RV-K black cable
2pole SpeakON connectors
ΩΩ2pole SpeakON connectors
ΩVelcro cable wrap, clear heat shrink, labelled with length & serialOTS-NL2/1-xxΩ2pole SpeakON Speaker Cable - Light Duty1m, 1.5m, 2m, 3m, 5m, 10m, 15m,
20m, 25m, 30mΩ2pole SpeakON connectorsΩ2pole SpeakON Speaker Cable - Light Duty20m, 25m, 30mΩ2pole SpeakON connectors

4POLE SPEAKON CABLE



(X m, 10m, 15m,	Ω Ω	4pole SpeakON Speaker Cable 4x 2.5mm ² RV-K black cable 4pole SpeakON connectors Velcro cable wrap, clear heat shrink, labelled with length & ser
XX m, 10m, 15m,	Ω	4pole SpeakON Speaker Cable - Light Duty 4x 1.5mm ² RV-K black cable 4pole SpeakON connectors
tX m, 10m, 15m,	Ω	4pole SpeakON Speaker Cable - Heavy Duty 4x 4mm ² RV-K black cable 4pole SpeakON connectors

8POLE SPEAKON CABLE

//	

OTS


20n

OTS

20 r

S-NL8/2-xx	Ω	8pole SpeakON Speaker Cable
5m, 2m, 3m, 5m, 10m, 15m,	Ω	8x 2.5mm ² Speaker Cable
25m, 30m	Ω	8pole SpeakON connectors
	Ω	Velcro cable wrap, clear heat shrink, labelled with length $\&\mbox{ serial}$
S-NL8/4-xx	Ω	8pole SpeakON Speaker Cable - Heavy Duty
5m, 2m, 3m, 5m, 10m, 15m,	Ω	8x 4mm ² Speaker Cable
25m, 30m	Ω	8pole SpeakON connectors

EP5 SPEAKER CABLE




DTS-EP5/2-xx 1m, 1.5m, 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m	 Ω 5pole EP5 Speaker Cable Ω 5x 2.5mm² RV-K black cable Ω Amphenol EP5 connectors Ω Velcro cable wrap, clear heat shrink, labelled with length & serial
DTS-EP5/4-xx 1m, 1.5m, 2m, 3m, 5m, 10m, 15m, 20m, 25m, 30m	 Ω 5pole EP5 Speaker Cable - Heavy Duty Ω 5x 4mm² RV-K black cable Ω Amphenol EP5 connectors Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

SIGNAL

XLR CABLES



XLR ADAPTERS

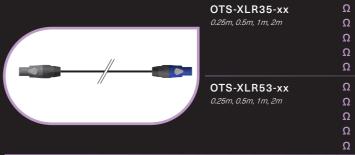

CAT6 ETHERCON



CATALOGUE | CABLE ASSEMBLIES



Ω 3pin Digital Audio / DMX Cable

- Ω Premium Double Shielded AES/EBU/DMX Cable
- $\Omega \ \ \, \text{Neutrik XLR Connectors}$
- Ω Coloured Boots / Labeling at no cost
- $\Omega\;$ Velcro cable wrap, clear heat shrink, labelled with length & serial

$\Omega~$ 3pin Male to 5pin Female XLR Adapter

- $\Omega~$ Premium Double Shielded AES/EBU/DMX Cable
- Ω Neutrik XLR Connectors
- Ω Coloured Boots / Labeling at no cost
- $\Omega~$ Velcro cable wrap, clear heat shrink, labelled with length & serial

$\Omega~$ 5pin Male to 3pin Female XLR Adapter

- $\Omega~$ Premium Double Shielded AES/EBU/DMX Cable
- $\Omega \quad \text{Neutrik XLR Connectors}$
- Ω Coloured Boots / Labeling at no cost
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

Ω Premium Cat6 CatSnake EtherCON Cables

- Ω Beldon 1302E S/FTP Cat6A CatSnake Cable
- Ω Neutrik EtherCON Connectors
- Ω Coloured Boots / Labeling at no cost
- $\Omega\;$ Each assembly is individually verified to confirm Cat6 Specifications,
- not just checked for continuity like cheaper versions
- Ω Velcro cable wrap, clear heat shrink, labelled with length & serial

ABOUT OMEGATECH

OmegaTech is a Western Australian privately owned company, specialising in the design and manufacture of equipment for the events industry. With over 20 years' of production experience, director Craig Beatson understands the importance of quality and reliability. OmegaTech specialises in custom solutions, providing unique products to an industry where one size seldom fits all. With an eye for precision and quality, OmegaTech prides itself on producing high quality products.

OMEGAΩTECH

w | www.omegatech.com.au

p | 1800 066 342

e | sales@omegatech.com.au