TECHNICAL SPECIFICATIONS
V3.01

OMEGAΩTECH
OTS-PDU-3PH-M

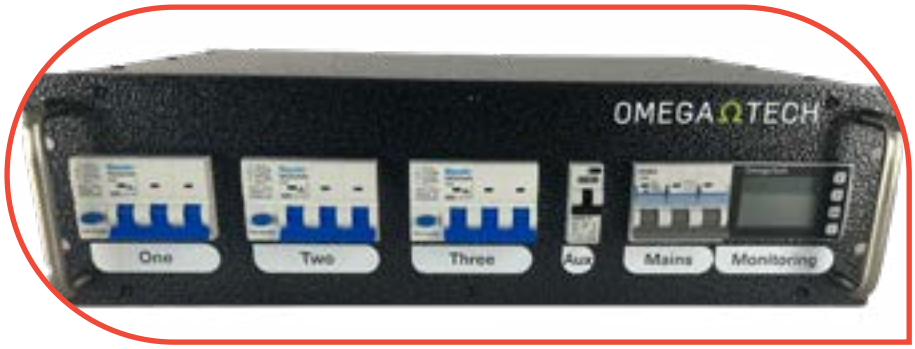









THREE PHASE DISTRIBUTION

KEY FEATURES

- Ω 32A or 63A 3Ø MCB Mains Isolator
- Ω 3x 3Ø 32A / 30mA Type A RCBO
- Ω 1x 10A / 30mA Type A RCBO
- Ω 3x 32A 56 Series Sockets
- Ω 1x 10A Australian GPO Convenience Socket
- Ω 2m 5core 6mm² or 10mm² RV-K High Flex Supply Cable
- Ω 32A 56 Series or CeeForm Plug
- Ω 19" 3RU 300mm 1.2mm / 2.0mm Zinc Anneal finished in hard wearing textured powder coat
- Ω Indelible colour markings for easy identification
- Ω Full Quality Control with component Serial Number tracking

ELECTRICAL

Input

- Ω 32A or 63A MCB Mains Isolator
- Ω 3Ø + N + PE
- Ω 220-240/ 380-415V
- Ω 50-60 Hz
- Ω 2m 5core 6mm² RV-K High-Flex tail with either
  - Ω 32A 3Ø 56 Series Plug
  - Ω 32A 3Ø CeeForm Plug
  - Ω 63A 3Ø CeeForm Plug

Output

- Ω 3x 32A 3Ø 56 Series Socket
- Ω 1 x 10A Australian GPO Socket

PHYSICAL	Nett	Gross
Height:	133mm (3RU)	155mm
Width:	483mm (19")	550mm
Depth:	300mm	550mm
Weight:	12.2kg	13.7kg

w | www.omegatech.com.au
p | 1800 066 342
e | sales@omegatech.com.au